


Optical Lamp K 1000863

Instruction sheet

09/15 SP/ALF

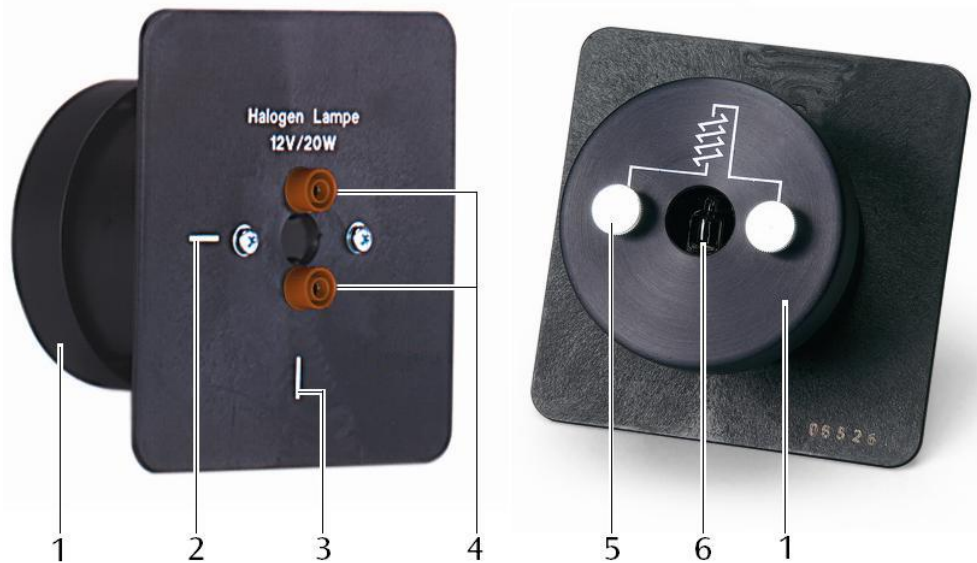

- 1 Protective cap
- 2 Alignment guide, horizontal
- 3 Alignment guide, vertical

- 4 4-mm safety sockets
- 5 Knurled securing screw
- 6 Light aperture and halogen lamp

1. Safety instructions

- Do not operate the lamp with a voltage higher than 12 V.
- Do not subject the light source to mechanical shocks or vibrations.

Caution! Lamps become hot when operated for long periods! There is a risk of burning!

- Do not touch a hot lamp.
- After a long period of operation, allow the lamp to cool for at least 20 minutes.

The light becomes very intense.

- Do not look directly into the lamp.

The grease from your hands will smudge the lamp and considerably reduce its operating life.

- Do not touch halogen lamp bulbs with your fingers, for example when changing a bulb. Instead use a cloth or a similar form of protection.

2. Description

The optical lamp K is used for experiments with the optical bench K (Kröncke optical system) in combination with the optical rider K.

The halogen lamp is mounted in a cylindrical housing on a reflector (100x100 mm²). It can be positioned with the coil either horizontal or vertical.

2.1 Accessories

Halogen lamp 12 V, 20 W	1003533
-------------------------	---------

3. Technical data

Halogen lamp:	12 V, 20 W
Connectors:	4 mm safety sockets
Overall dimensions:	60x100x100 mm approx.
Mass:	130 g approx.

4. Operation

Recommended additional equipment:

For supplying the voltage for the halogen lamp:

Transformer 12 V, 25 VA @230 V 1000866

or

Transformer 12 V, 25 VA @115 V 1000865

For mounting the halogen light source:

Optical rider K 1000862

For carrying out the experiments:

Optical bench K, 500 mm 1009926

or

Optical bench K, 1000 mm 1009696

Optical components from the Kröncke optical system

- Set up the experiment.
- Mount the halogen light source on the optical rider K in the vertical or horizontal position according to preference, and connect it to the transformer.
- Carry out the experiment.

5. Changing the bulb

- Disconnect the voltage supply from the halogen light source.
- If necessary, allow the halogen light source to cool.
- Loosen the knurled securing screws and remove the protective cap.
- Using a cloth or similar material, take out the halogen bulb replace it with the new one.
- Refit the protective cap and tighten the screws.
- When disposing of a used halogen lamp, comply with local regulations.